

BISAZZA

Declaration of performance

According to Annex III of the Regulation (EU) No. 305/2011

DOP B 16/002 EN

1. Unique identification code of the product-type:

Adhoc + Ultra

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):

Batch No.: see packaging of the product

3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:

EN 12004 C2TE S2

Improved deformable cementitious adhesive with reduced slip and extended open time for tiles for indoor and outdoor use

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):

**BISAZZA S.p.A.
Viale Milano, 56 – 36075 Alte di Montecchio Maggiore (VI) – ITALY
www.bisazza.com**

5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):

Not applicable

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

System 3

7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:

The notified body **ELLETIPI S.R.L., ID No. 1308** performed the determination of **the product type** on the basis of type testing under system **3** and issued the testing reports No. **24894/14, 24898/14, 24902/14, 24906/14 24910/14 24914/14 and 24918/14.**

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

Not applicable

BISAZZA

9. Declared performance

Essential characteristics	Performance	Harmonized technical specification
Early tensile adhesion strength	NPD	EN 12004:2007+A1:2012
Initial shear adhesion strength	$\geq 1,0 \text{ N/mm}^2$	
Tensile adhesion strength after water immersion	$\geq 1,0 \text{ N/mm}^2$	
Tensile adhesion strength after heat ageing	$\geq 1,0 \text{ N/mm}^2$	
Tensile adhesion strength after freeze/thaw cycle	$\geq 1,0 \text{ N/mm}^2$	
Reaction to fire	Class F	
Dangerous substances	Refer to SDS	

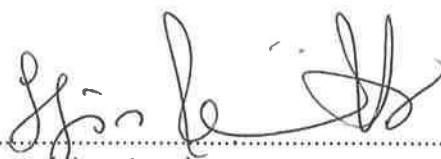
10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

PERISSINOTTO SERGIO - OPERATIONS DIRECTOR
(name and position)

Vicenza, 01/08/2016
(place and date of issue)


(signature)